



trivum Digital Input Adapter

Article-Number: 500011 EAN: 4260393850194

trivum Analog Input Adapter

Article-Number: 500010 EAN: 4260393850187

The trivum Digital Input adapter convert in a simple way optical TOSLINK sources to the trivum AudioBus.

The trivum Analog Input adapter uses a 3.5mm (1/8 inch) TRS for it's input. So it is flexible for daily application.

The trivum AudioBus is our special bus for audio sources. It's designed for high quality audio connections and to avoid interference.



trivum AudioBus connection



3.5 mm jack socket



optical TOSLINK jack



Digital Input

With the optical TOSLINK connection you can connect high-grade CD player, TV, video game consoles and many more devices to your trivum Multiroom System.



Analog Input

With the analog input connection you can connect fast and simple a wide range of analog audio sources.



trivum AudioBus

The connection to your trivum system. With a shielded CAT-5 cable you don't need any special wiring. With it's symmetrical routing, it avoid interference for a high quality audio connection.



Bus powered

Our trivum AudioBus supply the power for the adapters. So you don't need any external power supply. That makes installation more easy with less wiring.

Function

Digital Input Adapter:
Convert digital audio sources to symmetrical trivum Audiobus. Support audio-sampling rates up to 96kHz / 24bit. Support mixdown from 5.1 channel-audio to 2 channel-audio.

Analog Input Adapter:
Convert analog sources to symmetrical trivum Audiobus.

Case

Material	steel
Color	black
Dimensions	70 mm x 25 mm x 37 mm
Total weight	105 g
Mounting	-

trivum AudioBus

Network cable (Cat-5 or higher) with S/UTP, SF/UTP, S/FTP or SF/FTP shielding.

Connections - Digital Input Adapter

Input	TOSLINK SPDIF (optical) (x1)
Output	RJ-45 (trivum AudioBus) (x1)

Connections - Analog Input Adapter

Input	3.5 mm jack socket (x1)
Output	RJ-45 (trivum AudioBus) (x1)

Compatibility

REG	AudioActuator 4x, AudioActuator 1x, RP311, RP341
PRO	InputConnect, SpeakerConnect, PowerAmpConnect


Power supply

No external power supply needed.
The adapter is bus powered from trivum Multiroom Player or trivum C4 system.





Connection example

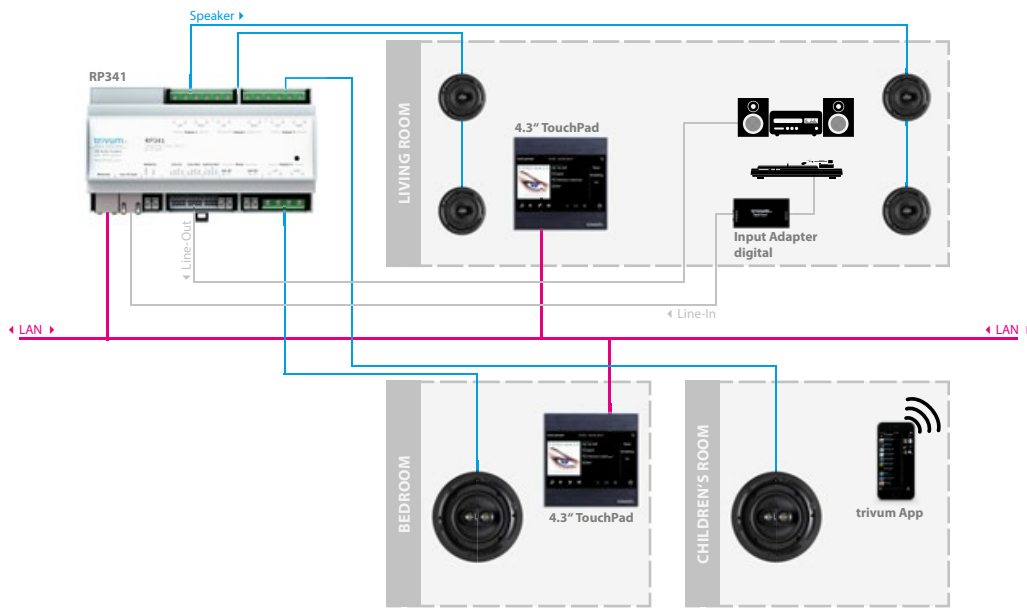

Dimensions

All measurements are given in millimeter (mm).

