



trivum SC348

Article-Number: 200012

EAN: 4260393850552

Absolute independence in music reproduction, in all areas, and meanwhile access on many external (analog) audio sources - that's the guiding principle of the trivum FLEX series.

Despite the performance of each FLEX product, it has a very compact and flexible design - for maximum freedom during installation. Whether as a wall mounting or as top or under installation, due to the small height of FLEX-products, they fit almost everywhere in between.

With the SC348, up to four zones can be operated independently. Four independent streaming sources make it possible. In addition, the SC348 offers eight analog audio inputs for other external audio sources (e.g. MP3 player, TV etc.). Whether locally from the NAS or from various music streaming services *: the SC348 always plays the right music.

For more than four zones, the SC348 can be combined with trivum REG, FLEX or DESIGN products. The integration into a KNX building automation is also possible. It is controlled by other components of trivum CONTROL series, a web browser or via KNX.

*Requires a paid subscription of the service provider.



Easy configuration

The configuration can be made via any browser-enabled end device – without any installation or further software.



Streaming

Four independent streaming clients allow playback of Internet radio, music streaming and AirPlay. And that completely independently from each other, in four zones.



Formats

The SC348 supports the most popular audio formats like MP3, AAC, ALAC, Flac, and WMA.



Amplifier

Four digital amplifiers with closed-loop technology and a high efficiency of >90% provide sufficient power and yet remain cool.



Powerful sound and individual adjustment

A simple adjustment for bass and treble offers plenty of range for your personal taste. A professional equalizer is at your disposal for more extensive sound improvements.



KNX

All FLEX models can be completely integrated into a KNX installation via KNX/IP router. Both control commands and status messages can be transmitted/received.



Analog audio input

Eight analog audio inputs extend the music playback for another eight external music sources (e.g. MP3 player, TV etc.)





Function

Multiroom-Audio System for music control and playback of streaming sources (online music services, AirPlay, NAS) and up to eight external audio sources in up to four zones.

Case

Material	steel
Color	black painted
Dimensions	250 mm x 244 mm x 40 mm
Total weight	2800 g
Mounting	wall mount or free standing

Playback

Streaming	NAS, TuneIn, AirPlay, online music services ¹
Radio	-
External sources	analog (x8)
Audio files	MP3, AAC, ALAC, Flac, WMA
Sample rate	up to 96 kHz

Connections

Ethernet	RJ-45 (x1)
Radio	-
Line-In (analog)	cinch jack (stereo x8)
Line-In (digital)	-
Line-Out (analog)	-
Speaker	4-pin terminal block (x4)

Amplifier

Typ	Class D
Music power (total)	240 W @ 4 Ω
Music power (per channel)	30 W @ 4 Ω (x8)
Impedance	4-8 Ω
Operating temperature	-20...+50 °C

Power supply

Input voltage	19 V DC
Input current	11 A
Max. power consumption	209 W
Power supply	included in the scope of delivery
Connector	4-pin Mini-DIN jack

Controls

trivum iPhone App, trivum TouchPad, KNX, web browser


Configuration

Tool	web browser Safari, Firefox, Chrome
Sound control	balance, treble, bass, 5-band-EQ (fully parametric)

KNX²

Functions	zone status, source, volume, text information, source control, actions
Visualization	Support for Gira HomeServer, Hager Domovea, Jung FAP
Connection	via KNX/IP router

Connection example

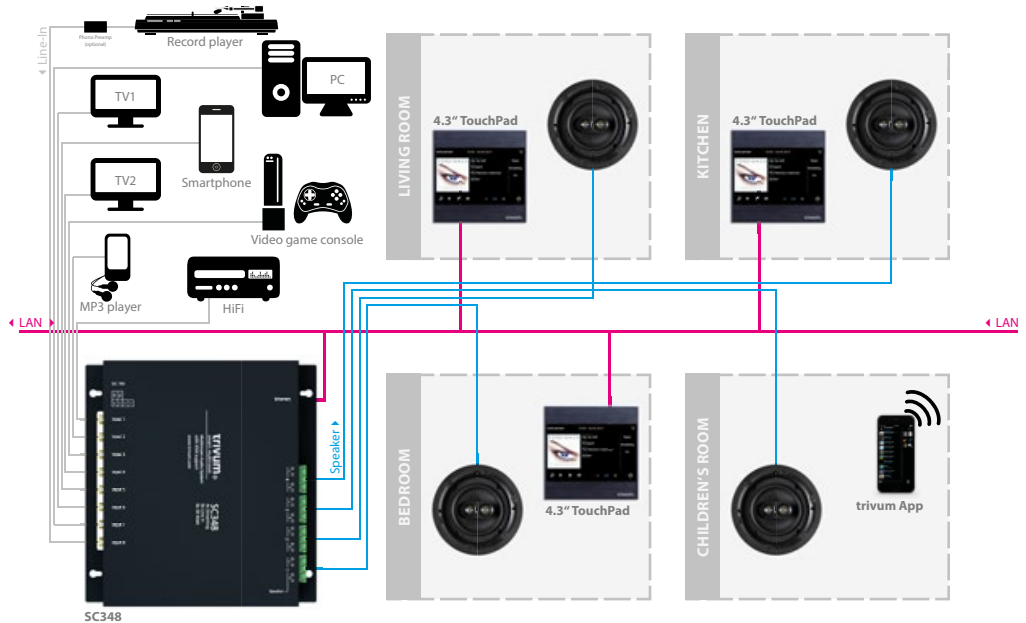

¹ please find our current list of supported online music services on www.trivum.de

² KNX is not required to use the main functions of the SC348.





Dimensions

All measurements are given in millimeter (mm).

